



TX

IP

H

DR. TORQUE®

# Torque Tool and Screwdriver





# About Us

## Torque Adapter

**General Use Torque Adapter ( 0.6 ~ 5.7Nm )**

A Series



02

**NEW**

**Small Torque Adapter ( 0.1 ~ 0.8Nm )**

STA Series



02

**Extend Torque Adapter ( 6 ~ 18Nm )**

ETA / ETB / ETC Series



03

**Mini Torque Adapter ( 10 ~ 70 cNm )**

MTA Series



04

**NEW**

**Power Tool Torque Adapter ( 2 ~ 5Nm )**

PTEQ Series



05

**NEW**

**5in1 Multi-Torque Adapter ( 2/ 3/ 4/ 5/ 6 Nm )**

5IN1 Series



06

## Handle

0-TPK-H01  
0-TPK-H02  
0-TPK-H03

Universal Handle  
Slim-Fit Handle  
T Flying Handle



07

# CONTENTS

## Bits

0-TPK-B01  
0-TPK-B02  
0-TPK-B03

**TORX®**  
**TORX PLUS®**  
**HEXAGON**



09

## Kits

### Pro Station

0-TPK26-PR

**TORX®**  
**TORX PLUS®**  
**HEXAGON**



13

### Togo Kit

0-TPK01-TG  
0-TPK02-TG  
0-TPK03-TG

**TORX®**  
**TORX PLUS®**  
**HEXAGON**



14

### Work Station

0-TPK01-PR  
0-TPK02-PR  
0-TPK03-PR

**TORX®**  
**TORX PLUS®**  
**HEXAGON**



15

### Smart Kit

0-TPK01-99

**TORX®**



16

### Single Set

0-TPK01-TX  
0-TPK02-IP  
0-TPK03-H

**TORX®**  
**TORX PLUS®**  
**HEXAGON**



## Accessory

- Torque Analyzer
- Magnet Tool Stand



18

## User Guide



19

# About Us

“SLOKY®” comes from the meaning of “SOLO KEY” in Taiwanese dialogue.



It is defined from the position of patented adapter in torque screwdriver system as a solo performer.

Patented adapter plays as a solo performer, with a unique feature to build whole product system. The torque's value is setting on the adapter; complied with various bits and handles become torque screwdrivers for tighten or loosen the screw.

Sloky torque screwdriver, a predicable, replaceable and organized tool.

It is considering to be used in industrial field having a greatest advantage of “no-over tighten”.

It prevents the damages of the screw and tool, in addition it provides a replaceable function to fit with driver bits having different shape and dimensions.

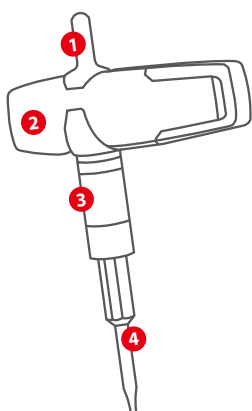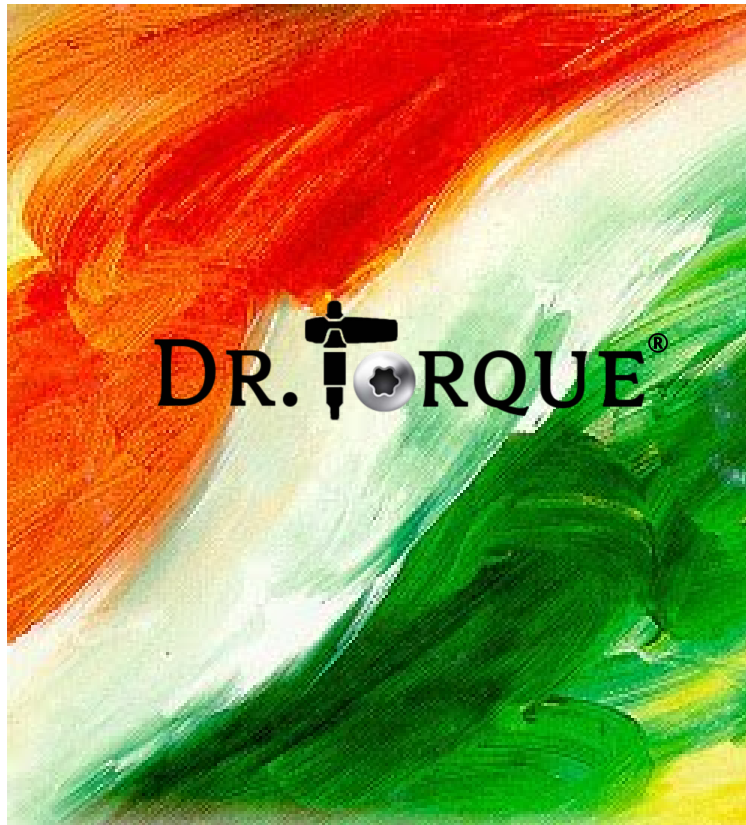

- ✓ 1. Fasten or loosen the screws quickly
- ✓ 2. Ergonomically refined design
- ✓ 3. Torque tested to DIN EN ISO 6789
- ✓ 4. Color recognition



# Predictable



- When the demand torque is reached, there is a click sound. For continued tightening on the screw, it is no longer to increase the torque on the screw.
- It has a reversible system to use the same screwdriver for tightening and loosening the screw.
- The limit of loosening torque is larger than the tightening torque to protect both tool and the screw from the breaking or damage.

*High efficiency  
High quality  
Highlight of Product*

# Replaceable




- Not only the bit, the torque adapter is also replaceable.
- Light and precise! Ideal as economic torque screwdriver.
- Fitting with a universal handle, the most compact size of torque screwdriver in the world is built.
- The cost of the torque adapter is lower in comparison with other brands.
- Different torque value preset adapter is available on request.



# Organized



- Persisting highest quality to supply SLOKY products and services to meet customer's satisfactions.
- Accomplishing customer's requirements by professional technology.

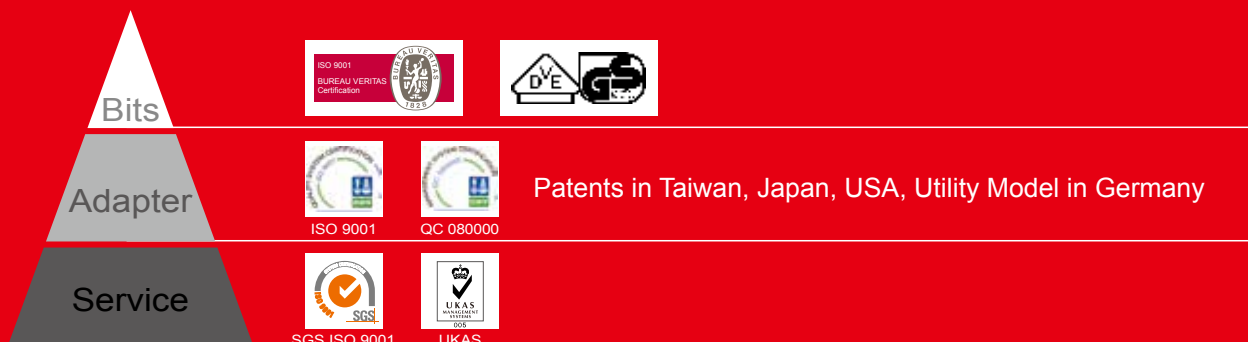

# Adapter

## Principle


"No- over tighten" adapter is created from the non-return ratchet torque socket. It comprised a shaft rod and a shaft cylinder.

A core shaft of shaft rod is sleeved with a mobile ratchet capable of axially moving; the shaft cylinder has a shaft slot formed for being sleeved with the core shaft.


When the core shaft rotates in the shaft slot and the applied torque exceeds the preset torque value, the core shaft idly rotates in the shaft slot.

It means when the demand torque is reached, continued tightening is no longer to increase the torque on the screw.

- Different connecting and / or driving parts are available on request.
- Torque range is possible from 0.1Nm~18Nm.

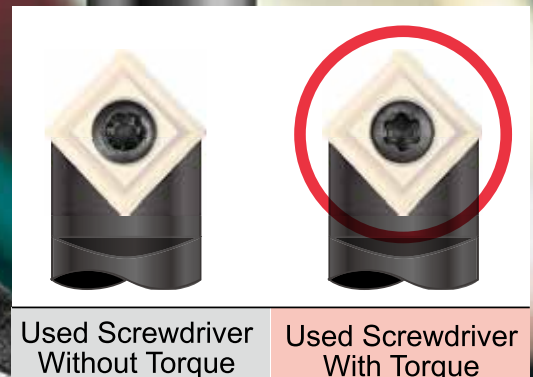

✓ According to DIN EN ISO 6789  
20,000 times product life test




Parts No.: 0-TPK12-EX

Create your own set



- General use for all kits.
- Special torque adapter or torque accuracy  $\pm 6\%$  are available on request. Please refer to P20.

Torque Accuracy :  $\pm 10\%$

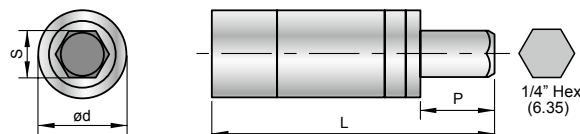

### Torque Adapter (A) Ø12 mm

- With \* mark is non-stock item. MOQ: 10 boxes.

Parts No.	Nm	KgfcM	In-lb	S (mm)	Ød (mm)	L (mm)	P (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-A06-0.6	0.6	6.1	5.3	DIN 3126 1/4" Hex (6.35mm)	12	38.3	10	3 pcs	80g	
0-TPK-A07-0.9	0.9	9.2	8.0							
0-TPK-A08-1.2	1.2	12.0	10.6							
0-TPK-A08-2.0	2.0	20.4	17.7							
0-TPK-A09-1.4	1.4	14.0	12.4							
0-TPK-A09-2.0	2.0	20.4	17.7							
0-TPK-A10-2.0	2.0	20.4	17.7							
0-TPK-A15-3.0	3.0	30.6	26.6							
0-TPK-A20-5.0	5.0	51.0	44.3							
0-TPK-A20-5.5	5.5	56.1	48.7							
0-TPK-A25-5.5	5.5	56.1	48.7	DIN 3126 1/4" Hex (6.35mm)	12	38.3	10	3 pcs	80g	
* 0-TPK-A00-1.0	1.0	10.2	8.8							
* 0-TPK-A00-1.5	1.5	15.3	13.3							
* 0-TPK-A00-2.2	2.2	22.4	19.5							
0-TPK-A00-2.5	2.5	25.5	22.1							
* 0-TPK-A00-3.5	3.5	35.7	31.0							
0-TPK-A00-3.8	3.8	38.7	33.6							
0-TPK-A00-4.0	4.0	40.8	35.4							
0-TPK-A00-4.5	4.5	45.9	39.8							
0-TPK-A00-5.7	5.7	58.0	50.4							

NEW

### Small Torque Adapter (STA) Ø10 mm

- With \* mark is non-stock item. MOQ: 10 boxes.



Parts No.	Nm	KgfcM	In-lb	S (mm)	Ød (mm)	L (mm)	P (mm)	Q'TY	N.W.	Packaging Illustration
* 0-TPK-STA-0.1	0.1	1.0	0.9	DIN 3126 1/4" Hex (6.35mm)	10	34.5	10	3 pcs	60g	
0-TPK-STA-0.2	0.2	2.0	1.8							
0-TPK-STA-0.3	0.3	3.1	2.7							
0-TPK-STA-0.4	0.4	4.1	3.5							
0-TPK-STA-0.5	0.5	5.1	4.4							
* 0-TPK-STA-0.6	0.6	6.1	5.3							
* 0-TPK-STA-0.7	0.7	7.1	6.2							
* 0-TPK-STA-0.8	0.8	8.2	7.0							



# Extend Torque Adapter


**6 ~ 18 Nm**




Torque Accuracy :  $\pm 10\%$

- Various types of connecting and driving design.
- With \* mark is non-stock item. MOQ: 30 pcs.


## ETA



## ETB




## ETC



Parts No.	Nm	KgfcM	In-lb	Driving S (mm)	Ød (mm)	L (mm)	P (mm)	Connecting H (mm)	Q'TY	N.W.
0-TPK-ETA-6.0	6.0	61.1	53.1	DIN 3126 1/4" Hex	20	43.5	10	DIN 3126 1/4" Hex	1 pc	80g
* 0-TPK-ETA-6.5	6.5	66.2	57.5							
* 0-TPK-ETA-7.0	7.0	71.3	62.0							
0-TPK-ETA-8.0	8.0	81.5	70.8							
0-TPK-ETA-10.0	10.0	101.9	88.5							
0-TPK-ETB-8.0	8.0	81.5	70.8	DIN 3126 1/4" Hex	20	44.5	--	DIN 3120 1/4" Square	1 pc	100g
0-TPK-ETB-10.0	10.0	101.9	88.5							
0-TPK-ETB-12.0	12.0	122.3	106.2							
* 0-TPK-ETB-15.0	15.0	152.9	132.8							
* 0-TPK-ETB-18.0	18.0	183.4	159.3							
0-TPK-ETC-8.0	8.0	81.5	70.8	DIN 3122/ DIN 3123 3/8" Square	20	53.0	12	DIN 3120 3/8" Square	1 pc	90g
0-TPK-ETC-10.0	10.0	101.9	88.5							
0-TPK-ETC-12.0	12.0	122.3	106.2							
* 0-TPK-ETC-15.0	15.0	152.9	132.8							
* 0-TPK-ETC-18.0	18.0	183.4	159.3							

EX : Connecting Part	Torque Adapter	EX : Driving Part
<b>1/4" Hex Drive</b>  Ratchet      T-handle Handle	<b>0-TPK-ETA</b> 1/4" Hex      1/4" Hex 	 Torx bits      Torx Plus bits  Hex bits      Flat head bits  PH bits      long bits
<b>1/4" Square Drive</b>  Sliding T-handle Ratchet      Handle	<b>0-TPK-ETB</b> 1/4" Square      1/4" Hex 	 Square Socket      Socket Bit_P2  Socket Bit_Hex
<b>3/8" Square Drive</b>  T-handle Handle      Ratchet	<b>0-TPK-ETC</b> 3/8" Square      3/8" Square 	 Square Socket      Socket Bit_P2  Socket Bit_Hex






# Mini *Mini* 10~70 cNm Torque Adapter

• Adapter diameter is only 8mm.



Torque Accuracy :  $\pm 10\%$

Installed with magnet

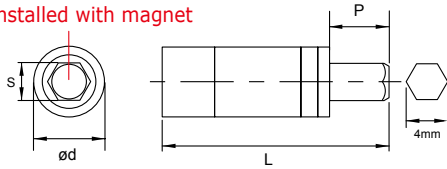


"No over tighten"

Parts No.	cNm	KgfcM	In-lb	S (mm)	ød (mm)	L (mm)	P (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-MTA-0.1	10	1.0	0.9	4mm Hex	8	32	10	3 pcs	35g	
0-TPK-MTA-0.2	20	2.0	1.8							
0-TPK-MTA-0.3	30	3.1	2.7							
0-TPK-MTA-0.4	40	4.1	3.5							
0-TPK-MTA-0.5	50	5.1	4.4							
0-TPK-MTA-0.6	60	6.1	5.3							
0-TPK-MTA-0.7	70	7.1	6.2							

## Mini Handle

**Parts No.: 0-TPK-H05**


- Aluminum Alloy made.
- Weight: 70g

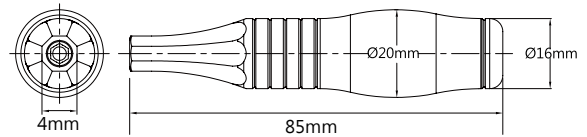


A total solution for applications below :

- Fine Cutting Tool
- Communication Devices
- Consumer Electronics
- Drones/UAV
- Smart Phones
- Printed Circuit Boards
- Watches .....

**Transform normal screwdriver to torque screwdriver**

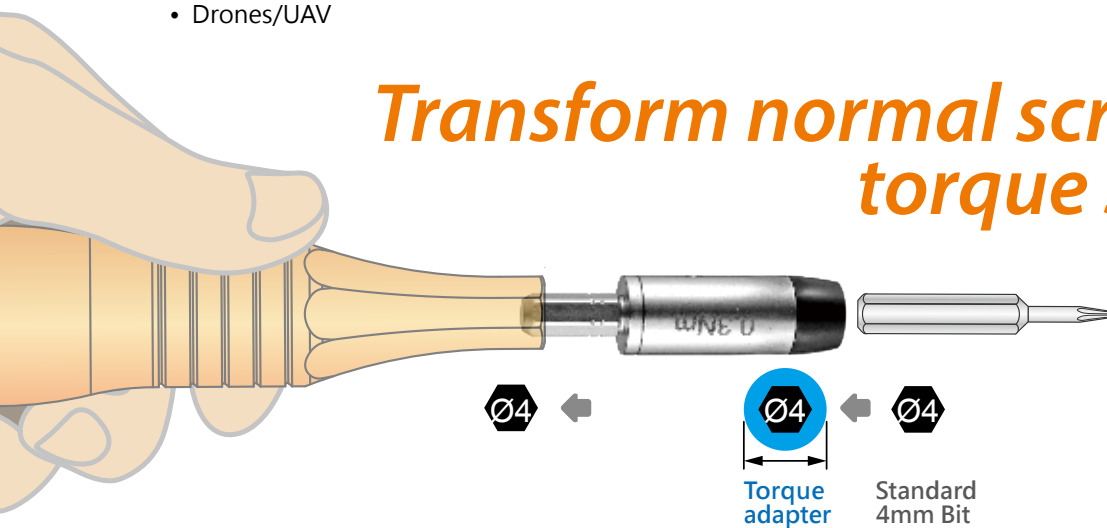

SLOKY mini torque adapter fits almost any kinds of the 4mm bits and handle with Ø4 mm in the market.



# Power Tool Torque Adapter


NEW

## E6.3 Torque Adapter (PT)

- With quick change design.
- Speed limits below 250 r.p.m.
- Further tightening by hand to reach required torque.
- Shorten tightening job for long screws or very many screws, and identical torque controlled.

Quick change

Torque Accuracy :  $\pm 10\%$

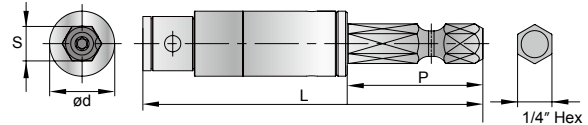

Parts No.	Nm	KgfcM	In-lb	S (mm)	ød (mm)	L (mm)	P (mm)	Q'TY	N.W.
0-TPK-PTEQ-6.3-2.0	2.0	20.4	17.7	DIN 3126 1/4" Hex	12	62.7	25	1 pc	35g
0-TPK-PTEQ-6.3-3.0	3.0	30.6	26.6						
0-TPK-PTEQ-6.3-4.5	4.5	45.9	39.8						
0-TPK-PTEQ-6.3-5.0	5.0	51.0	44.3						

## Power Tool Adapter Inquiry Form


email to : [sloky@jimmore.com.tw](mailto:sloky@jimmore.com.tw)

Company / Name

Phone / Email

### Requirement :

☐ E Type

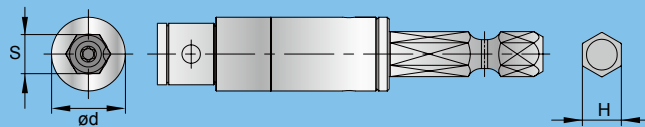


Driving Part :

☐ 6.3mm ☐ 6mm ☐ Other \_\_\_\_\_

Connecting Part :

☐ 6.3mm ☐ 6mm ☐ Other \_\_\_\_\_

☐ C Type

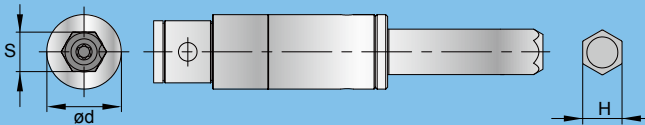

Driving Part :

☐ 6.3mm ☐ 6mm ☐ Other \_\_\_\_\_

Connecting Part :

☐ 6.3mm ☐ 6mm ☐ Other \_\_\_\_\_

DIN / ISO standard :

Torque accuracy :

☐  $\pm 10\%$  ☐  $\pm 6\%$

Required torque :

Remark :

Nm

Color ring :



# 5in1 Multi-Torque Adapter

## 2, 3, 4, 5, 6Nm

### Features:


- Visually define torque value on adapter.
- Universal type, 5 in 1 torque control from 2Nm to 6Nm.
- No more over or under tightening on your screw.
- Easy to use for multiple torque requirements.
- Not for loosening.



Multi-Torque Adapter Kit ▲

Parts No.: 0-TPK-5IN1-H03


5in1  
Multi-Torque  
Adapter

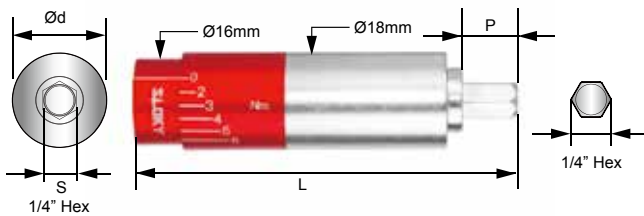

Parts No.	Nm	KgfcM	In-lb	S (mm)	Ød (mm)	L (mm)	P (mm)	Q'TY	N.W.
0-TPK-5IN1-6.0	2.0	20.4	17.7	DIN 3126 1/4" Hex	18	68.8	10	1 pc	105g
	3.0	30.6	26.6						
	4.0	40.8	35.4						
	5.0	51.0	44.3						
	6.0	61.1	53.1						


### How to Use:

1. Pick the handle and bit that you need.

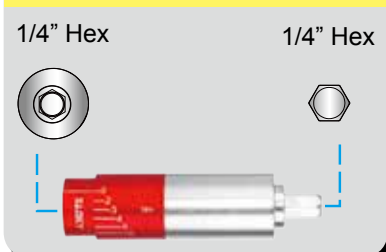


- Any 1/4" Hex handle and 1/4" Hex bits.

2. Turn the adapter clockwise, until the required torque is aligned with datum line.  
→ Torque has reached.

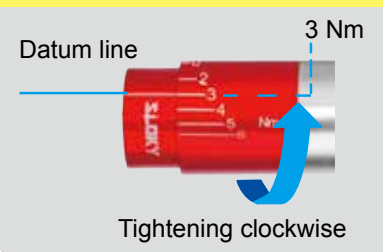

- Visually determine the torque value during the tightening process.
- Max. 6.0Nm, tool life test up to 5,000 times.

3. Release the adapter. It will back to "0" position automatically.

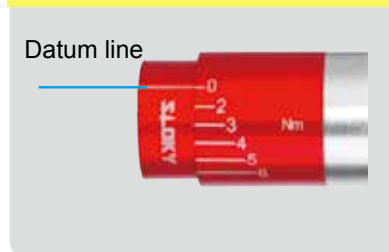

- 5in1 torque adapter is not for loosening.
- Manual operation, not for power tools.

# Handle

Use same torque screwdriver to fasten and loosen your screw.

90°

## Features

We offer **3** different types of handle to cover all torque adapters.

The soft zone is comfortable to hold and play very flexible.  
Easy to tighten and loosen screws even in higher torque range.

The outstanding design of the SLOKY handle that fits perfectly into the hand and prevents the hand injuries such as blisters and calluses.

✓ The ergonomic design of the handle





### Universal Handle

Features :

- Universal type for holding in multi-ways.
- Having large support surfaces for thumb and index finger ease of use and efficiency.
- Remaining the advantages of flag design, driving the screw easily.




Fig	Parts No.	Suit For Torque	Color	S (mm)	L (mm)	H (mm)	Ød (mm)	N.W.
1	0-TPK-H01	0.6~5.7 Nm	Red	6.35 (1/4")	37.5	70.7	5	25g
	0-TPK-H01-B		Blue					

### Slim-Fit Handle

Features :

- Comfortable holding, for accurate and efficient while fastening and loosening small size screws.

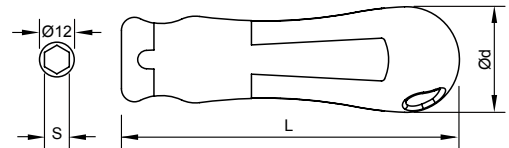


Fig	Parts No.	Suit For Torque	Color	S (mm)	L (mm)	Ød (mm)	N.W.
2	0-TPK-H02	0.6~2.0 Nm	Red	6.35 (1/4")	104	32.5	50g
	0-TPK-H02-B		Blue				

### T Flying Handle

Features :

- It is light, even it is designed for higher torque.
- The striking soft zone that allows particularly comfortable, best handle for using at higher torque.





Fig	Parts No.	Suit For Torque	Color	S (mm)	L (mm)	H (mm)	N.W.
3	0-TPK-H03	3.0~10.0 Nm	Red	6.35 (1/4")	65	100	60g
	0-TPK-H03-B		Blue				

### Choose handle for different torque range

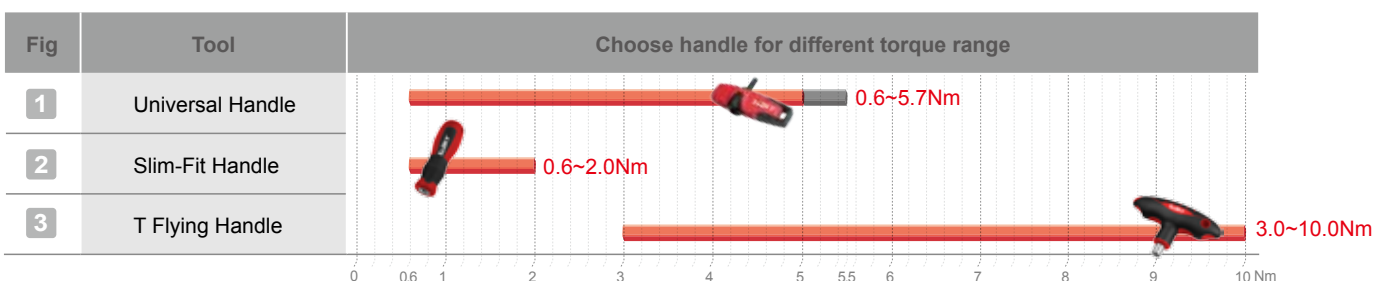

# Bits

## Color Identity

No mistake!

The color identification is visible on both adapters and bits.

Select suitable torque size by color management system indicated on torque adapters and bits.

It is to enhance the convenience of using and delivery proper tightening torque.



TORX®



TORX PLUS®



HEXAGON

TX20 / 20IP / H4  
TX25 / 25IP / H5

TX15 / 15IP / H3

TX10 / 10IP / H2.5

TX9 / 9IP

TX8 / 8IP / H2

TX7 / 7IP

TX6 / 6IP / H1.5



Tools created from ideas

# Spare

Hardness : HRC 58° ~ 60°  
Material : High alloy steel

TORX®




- TORX® drive between tool and screw by line or surface contact rather than point contact.
- It also increases the amount of torque and force that can be transferred.

Bits

TORX®

## 25mm Bits for TORX® screws


Standard : DIN3126 – C6.3 (1/4")



Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B01-TX06-25	TX6	25	6 pcs	32 g	
0-TPK-B01-TX07-25	TX7			32 g	
0-TPK-B01-TX08-25	TX8			32 g	
0-TPK-B01-TX09-25	TX9			32 g	
0-TPK-B01-TX10-25	TX10			32 g	
0-TPK-B01-TX15-25	TX15			34 g	
0-TPK-B01-TX20-25	TX20			34 g	

## 50mm Bits for TORX® screws


Standard : Similar to DIN3126 – C6.3 (1/4")



Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B01-TX06-50	TX6	50	6 pcs	54 g	
0-TPK-B01-TX07-50	TX7			54 g	
0-TPK-B01-TX08-50	TX8			54 g	
0-TPK-B01-TX09-50	TX9			56 g	
0-TPK-B01-TX10-50	TX10			58 g	
0-TPK-B01-TX15-50	TX15			60 g	
0-TPK-B01-TX20-50	TX20			62 g	
0-TPK-B01-TX25-50	TX25			62 g	

## 75mm Bits for TORX® screws

Standard : Similar to DIN3126 – E6.3 (1/4")



Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B01-TX08-75	TX8	75	6 pcs	58 g	
0-TPK-B01-TX09-75	TX9			64 g	
0-TPK-B01-TX10-75	TX10			70 g	
0-TPK-B01-TX15-75	TX15			70 g	
0-TPK-B01-TX20-75	TX20			78 g	
0-TPK-B01-TX25-75	TX25			88 g	

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.


# Spare

Hardness : HRC 58° ~60°  
Material : High alloy steel

## 25mm Bits for TORX PLUS® screws

Standard : DIN3126 – C6.3 (1/4")


- Larger contact surface between tool and screw.
- The line of effective force is in the direction of movement (direction of rotation).



Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B02- 6IP-25	6IP	25	6 pcs	32 g	
0-TPK-B02- 7IP-25	7IP			32 g	
0-TPK-B02- 8IP-25	8IP			32 g	
0-TPK-B02- 9IP-25	9IP			32 g	
0-TPK-B02-10IP-25	10IP			32 g	
0-TPK-B02-15IP-25	15IP			34 g	
0-TPK-B02-20IP-25	20IP			34 g	

## 50mm Bits for TORX PLUS® screws


Standard : Similar to DIN3126 – C6.3 (1/4")



Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B02- 6IP-50	6IP	50	6 pcs	54 g	
0-TPK-B02- 7IP-50	7IP			54 g	
0-TPK-B02- 8IP-50	8IP			54 g	
0-TPK-B02- 9IP-50	9IP			56 g	
0-TPK-B02-10IP-50	10IP			58 g	
0-TPK-B02-15IP-50	15IP			60 g	
0-TPK-B02-20IP-50	20IP			62 g	
0-TPK-B02-25IP-50	25IP			66 g	

## 75mm Bits for TORX PLUS® screws

Standard : Similar to DIN3126 – E6.3 (1/4")



Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B02- 8IP-75	8IP	75	6 pcs	64 g	
0-TPK-B02- 9IP-75	9IP			66 g	
0-TPK-B02-10IP-75	10IP			72 g	
0-TPK-B02-15IP-75	15IP			72 g	
0-TPK-B02-20IP-75	20IP			78 g	
0-TPK-B02-25IP-75	25IP			86 g	

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.



HEXAGON




• Screwdriver bit with external hexagonal profile.

Spare


Hardness : HRC 58° ~ 60°  
Material : High alloy steel

**25mm Bits for HEXAGON screws**  
Standard : DIN3126 – C6.3 (1/4")



Parts No.	Driver Size	H (mm)	G (mm)	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B03-H015-25	H1.5	1.5	2.3			32 g	
0-TPK-B03-H020-25	H2	2.0	3.0			32 g	
0-TPK-B03-H025-25	H2.5	2.5	3.8			33 g	
0-TPK-B03-H030-25	H3	3.0	4.5			34 g	
0-TPK-B03-H040-25	H4	4.0	6.0			36 g	
0-TPK-B03-H050-25	H5	5.0	7.5			40 g	
				25	6 pcs		

**50mm Bits for HEXAGON screws**  
Standard : DIN3126 – E6.3 (1/4")

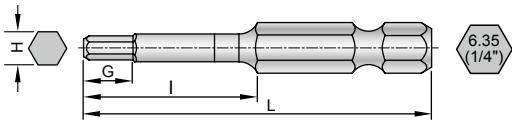

Parts No.	Driver Size	H (mm)	G (mm)	I (mm)	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B03-H015-50	H1.5	1.5	2.3				50 g	
0-TPK-B03-H020-50	H2	2.0	3.0				51 g	
0-TPK-B03-H025-50	H2.5	2.5	3.8				54 g	
0-TPK-B03-H030-50	H3	3.0	4.5				57 g	
0-TPK-B03-H040-50	H4	4.0	6.0				64 g	
0-TPK-B03-H050-50	H5	5.0	7.5				72 g	
				25	50	6 pcs		

Bits

HEXAGON
















# Pro Station



Parts No.: 0-TPK26-PR-22K

All-in-One **TORX®** **TORX PLUS®** **HEXAGON** tools for professional using

Handle	Contents										N.W.
	Adapter				 50mm Bits for TORX®	 50mm Bits for TORX PLUS®	 50mm Bits for HEXAGON				
	Nm	KgfcM	In-lb	Q'TY	Size	Q'TY	Size	Q'TY	Size	Q'TY	
 TPK-H02-B	 0.6	6.1	5.3	1 pc	TX6	1 pc	6IP	1 pc	H1.5	1 pc	1600g
	 0.9	9.2	8.0		TX7		7IP		-	-	
	 1.2	12.0	10.6		TX8		8IP		H2	1 pc	
	 1.4	14.0	12.4		TX9		9IP		-	-	
 TPK-H01-B	 2.0	20.4	17.7		TX10		10IP		H2.5	1 pc	
	 3.0	30.6	26.6		TX15		15IP		H3		
	 5.0	51.0	44.3		TX20		20IP		H4		
	 5.5	56.1	48.7		TX25		25IP		H5		

## Tool Stand

Parts No.: 0-TPK26-PR

- Good for storage and workbench.
- Tool stand is made of aluminum alloy, silver coating.
- Dimension (L x W x H) : 170x120x30mm.



N.W.: 1000g

## KEEP YOUR SCREW SAFE




### Click sound

- Let<CLICK> tell you when the torque is reached !
- Quick release !



### Rapid-out

- Simply pull the bit outward to change new bit.
- Perfect positioning in the bits.



### Color recognition

- The color identification is visible on both adapters and bits.

DR. TORQUE

10~70cNm  
Dia.8

0.1~0.8Nm  
Dia.10

0.6~5.7Nm  
Dia.12

6~18Nm  
Dia.20

### INNOVATION

Patented in multi-country

- Special torque adapter is available on request from 0.1~18 Nm by different adapter size.



# Togo Kit

Collecting the most popular torque tools  
Ready to go.

## Torque Screwdriver Kit for **TORX®** , 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration
	Handle	Adapter				Bit		
		Size	Nm	Kgfcmm	In-lb	25mm+50mm		
0-TPK01-TGTX-12K	TPK-H02	TX6	0.6	6.1	5.3	1 pc + 1 pc	445g	
		TX7	0.9	9.2	8.0			
		TX8	1.2	12.0	10.6			
	TPK-H01	TX9	1.4	14.0	12.4			
		TX10	2.0	20.4	17.7			
		TX15	3.0	30.6	26.6			

## Torque Screwdriver Kit for **TORX PLUS®** , 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration
	Handle	Adapter				Bit		
		Size	Nm	Kgfcmm	In-lb	25mm+50mm		
0-TPK02-TGIP-12K	TPK-H02-B	6IP	0.6	6.1	5.3	1 pc + 1 pc	445g	
		7IP	0.9	9.2	8.0			
		8IP	1.2	12.0	10.6			
	TPK-H01-B	9IP	1.4	14.0	12.4			
		10IP	2.0	20.4	17.7			
		15IP	3.0	30.6	26.6			

## Torque Screwdriver Kit for **HEXAGON** , 25mm+50mm Bits








Parts No.	Contents						N.W.	Packaging Illustration
	Handle	Adapter				Bit		
		Size	Nm	Kgfcmm	In-lb	25mm + 50mm		
0-TPK03-TGHX-12K	TPK-H02	H1.5	0.6	6.1	5.3	1 pc + 1 pc	445g	
		H2.0	1.2	12.0	10.6			
		H2.5	2.0	20.4	17.7			
	TPK-H01	H3.0	3.0	30.6	26.6			
		H4.0	5.0	51.0	44.3			
		H5.0	5.5	56.1	48.7			

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.








Togo Kit

# Work Station *For your long time using and storage.*








## Torque Screwdriver Kit for **TORX®** , 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration	
	Handle	Adapter				Bit			
		Size	Nm	Kgfcmm	In-lb	25mm+50mm			
0-TPK01-PR-12	TPK-H02		TX6	0.6	6.1	5.3	1 pc + 1 pc	855g	
			TX7	0.9	9.2	8.0			
			TX8	1.2	12.0	10.6			
	TPK-H01		TX9	1.4	14.0	12.4			
			TX10	2.0	20.4	17.7			
			TX15	3.0	30.6	26.6			

## Torque Screwdriver Kit for **TORX PLUS®** , 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration	
	Handle	Adapter				Bit			
		Size	Nm	Kgfcmm	In-lb	25mm+50mm			
0-TPK02-PR-12	TPK-H02-B		6IP	0.6	6.1	5.3	1 pc + 1 pc	855g	
			7IP	0.9	9.2	8.0			
			8IP	1.2	12.0	10.6			
	TPK-H01-B		9IP	1.4	14.0	12.4			
			10IP	2.0	20.4	17.7			
			15IP	3.0	30.6	26.6			

## Torque Screwdriver Kit for **HEXAGON** , 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration
	Handle	Adapter				Bit		
		Size	Nm	Kgfcmm	In-lb	25mm + 50mm		
0-TPK03-PR-12	TPK-H02	 H1.5	0.6	6.10	5.30	1 pc + 1 pc	855g	
		 H2.0	1.2	12.0	10.6			
		 H2.5	2.0	20.4	17.7			
	TPK-H01	 H3.0	3.0	30.6	26.6			
		 H4.0	5.0	51.0	44.3			
		 H5.0	5.5	56.1	48.7			


TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.



# Smart Kit

Cover 0.6Nm to 5.5Nm adapters with one universal handle.

Torque Screwdriver Kit for **TORX®** , 25mm Bits




Parts No.	Contents						N.W.	Metric Screw	Packaging Illustration
	Handle	Adapter				Bit			
		Size	Nm	KgfcM	In-lb	25mm			
0-TPK01-99-06K	TPK-H01	TX6	0.6	6.1	5.3	1 pc	290g	M1.8 M2	
		TX7	0.9	9.2	8.0			M2 M2.2	
		TX8	1.2	12.0	10.6			M2.2 M2.5	
		TX9	2.0	20.4	17.7			M3 M3.5	
		TX15	3.0	30.6	26.6			M3.5 M4	
		TX20	5.5	56.1	48.7			M5 M5.5	

Smart Kit  
Single Set

# Single Set

Economical Starter












Torque Screwdriver Single Set for **TORX®** , 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration	
	Handle	Adapter			Bit				
		Nm	KgfcM	In-lb	Size	25mm+50mm			
0-TPK01-TX06-0.6-S	TPK-H02		0.6	6.1	5.3	TX6	2 pcs + 2 pcs	122g	
0-TPK01-TX07-0.9-S			0.9	9.2	8.0	TX7			
0-TPK01-TX08-1.2-S			1.2	12.0	10.6	TX8			
0-TPK01-TX08-2.0	TPK-H01		2.0	20.4	17.7	TX8	2 pcs + 2 pcs	130g	
0-TPK01-TX09-1.4			1.4	14.0	12.4	TX9			
0-TPK01-TX09-2.0			2.0	20.4	17.7				
0-TPK01-TX10-2.0			2.0	20.4	17.7	TX10			
0-TPK01-TX15-3.0			3.0	30.6	26.6	TX15			
0-TPK01-TX20-5.0			5.0	51.0	44.3	TX20			
0-TPK01-TX20-5.5			5.5	56.1	48.7	TX20			
0-TPK01-TX2025-5.5	TPK-H03		5.5	56.1	48.7		Bit 50mm	200g	
						TX20	2 pcs		
						TX25	2 pcs		




TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.

# Single Set *Economical Starter*

**Torque Screwdriver Single Set for TORX PLUS® , 25mm+50mm Bits**

Parts No.	Contents						N.W.	Packaging Illustration	
	Handle	Adapter			Bit				
		Nm	Kgfcmm	In-lb	Size	25mm+50mm			
0-TPK02- 6IP-0.6-S	TPK-H02-B		0.6	6.1	5.3	6IP	2 pcs + 2 pcs	130g	
0-TPK02- 7IP-0.9-S			0.9	9.2	8.0	7IP			
0-TPK02- 8IP-1.2-S			1.2	12.0	10.6	8IP			
0-TPK02- 9IP-1.4	TPK-H01-B		1.4	14.0	12.4	9IP	2 pcs + 2 pcs	130g	
0-TPK02-10IP-2.0			2.0	20.4	17.7	10IP			
0-TPK02-15IP-3.0			3.0	30.6	26.6	15IP			
0-TPK02-20IP-5.0			5.0	51.0	44.3	20IP			
0-TPK02-2025IP-5.5	TPK-H03-B		5.5	56.1	48.7		Bit 50mm	200g	
						20IP	2 pcs		
						25IP	2 pcs		

**Torque Screwdriver Single Set for HEXAGON , 25mm+50mm Bits**

Parts No.	Contents						N.W.	Packaging Illustration
	Handle	Adapter			Bit			
		Nm	Kgfcmm	In-lb	Size	25mm+50mm		
0-TPK03-H020-1.2	TPK-H02	1.2	12.0	10.6	H2	2 pcs + 2 pcs	150g	
0-TPK03-H025-2.0	TPK-H01	2.0	20.4	17.7	H2.5	2 pcs + 2 pcs	135g	
0-TPK03-H030-3.0		3.0	30.6	26.6	H3			
0-TPK03-H040-5.0	TPK-H03	5.0	51.0	44.3	H4	4 pcs	200g	

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.

# Accessory

## Torque Analyzer (Made in Japan)



**Parts No.: 08-CD-100M**

Model No.		CD-100M
Measuring Range	Nm	0.10~10.00
	kgf-cm	1.0~100.0
	lbf-in	1.0~90.0
Accuracy		±0.5% (199 or less digit ± 1 digit)
Display		The 3.5 figures digital display of LCD
Measurement Mode	P-P	The maximum under measurement is always displayed.
	T-R	The value of the load torque concerning a detector is displayed as it is.
	P-D	A value when a load torque value changes from a rise to descent is displayed.
Transmission interface		USB (Baud rate : 19200)
Auto Power Off		Power-supply OFF is carried out after the neglect during 10 minutes.
Battery		Ni-cd battery : 1.2V/5cells (700mAh)
Charge time / Use time		About 3 hours / About 12 hours use consecutive at full charge time
Size / Weight		160(W) X 125(D) X 55(H)mm / 1kg
Measurement Joint	Spec.	SJ-50
	Measurement Range	0.5~5 Nm

Accessory

## 3 Seats Magnet Tool Stand

- ✓ Quick and fix on anywhere with metal surface.
- ✓ Acrylic material with magnet support up to 1kg.
- ✓ All SLOKY screwdrivers can be fit with.

**Parts No.: 0-TPK-03S**






▲ Not include torque screwdriver



# User Guide

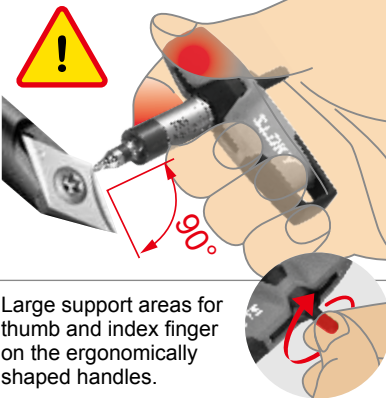


Why the torque may get low after use a certain time?	How to judge?
<p>The torque adapter is functional by the radial direction friction; it is different from the marketed product nowadays.</p> <p>When an object slips or is going to slip with another object, on the two contact faces will create a relative action. This relative action is called the static friction, it creates the abrasion after use a certain time. The preset torque of adapter may get low due to this abrasion.</p>	<ul style="list-style-type: none"> <li>• <math>\pm 10\%</math> allowance for torque adapter is acceptable.</li> <li>• Please check it on torque analyzer or measurement.</li> </ul>

## The tips of using different handle

 <p>Large support areas for thumb and index finger on the ergonomically shaped handles.</p> <p>The transmission of high torque is thus quite simple. Cylindrical handle shaft for quick turning of screws.</p>	 <p>The Slim Fit handle has been designed to fit snugly in your hand, making blisters and calluses a thing of the past, even after intensive use.</p> <p>The handle hard zones allows the hand to easily glide during hand repositioning. The soft zones ensures full force transfer through the grip.</p>	 <p>The T Flying handle is needed whenever particularly high torque for loosening or tightening jobs needs to be applied.</p> <p>The power is transferred positively, there is no frictional loss between the hand and the handle.</p>
---	--	---
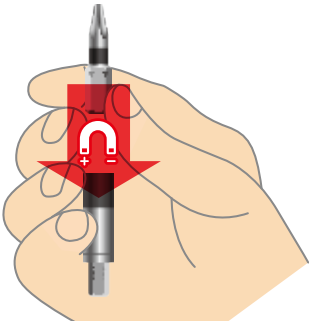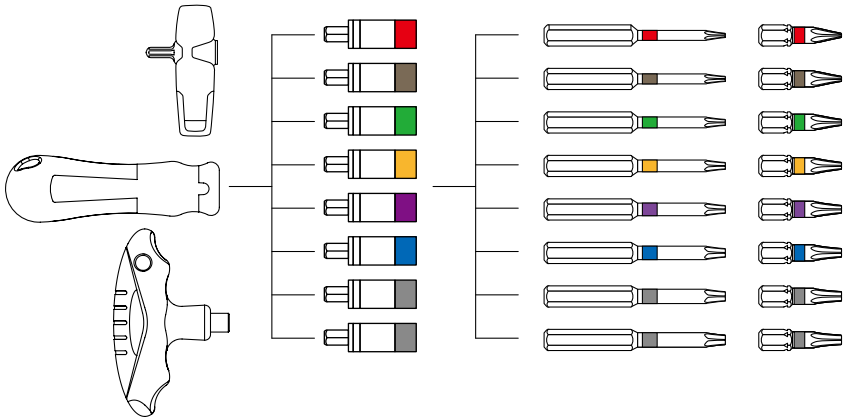
## Simple operation      Exchange bits system with colour coding

 <p>All adapters with magnet, the bits can be inserted and automatically locked into the adapters.</p>	
---	--

✓	✓	⚠ Warning
<p><b>Higher reversible torque</b></p>  <p>Reversible system. 30% higher torque for loosening.</p>	<p><b>Use same tool</b></p>  <p>No need to change. Use SAME torque screwdriver to fasten and loosen your screws.</p>	<p><b>Tightened screws with unknown torque</b></p>  <p>Do not use Dr. Torque screwdriver to loosen tightened screws with unknown torque.</p>


# Special Inquiry

Please send your inquiry to :  
[cs@torquetoolsindia.com](mailto:cs@torquetoolsindia.com)



► Company / Name

► Phone / Email

Requirement :



Driving

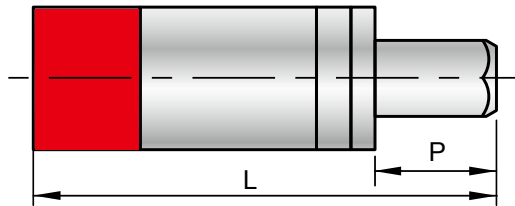

Connecting

**Driving Part (S) :**

- ☐ Male    ☐ Female  
☐ Hex    ☐ Square

Size: \_\_\_\_\_ mm/inch

**Adapter Size :**

ød \_\_\_\_\_ mm

L \_\_\_\_\_ mm

P \_\_\_\_\_ mm

**Connecting Part (H) :**

- ☐ Male    ☐ Female  
☐ Hex    ☐ Square

Size: \_\_\_\_\_ mm/inch

**Required Torque :**

\_\_\_\_\_ Nm  
 (Unit conversion : 1Nm = 10.20kgf-cm = 8.85in-lb)

**Tolerance :**

- ☐ ± 10%    ☐ ± 6%

**Remark :**

**Required Bits :**

Size: \_\_\_\_\_

Type: \_\_\_\_\_

Length: \_\_\_\_\_ mm



## Precise Laboratory Systems







# CONSTRUCTION



# POWER TOOL

\* Limits below 250 r.p.m


DR.  TORQUE

*Smart Torque, Everywhere Possible!*

*Custom Design* to meet  
your specific applications



# SPORTS

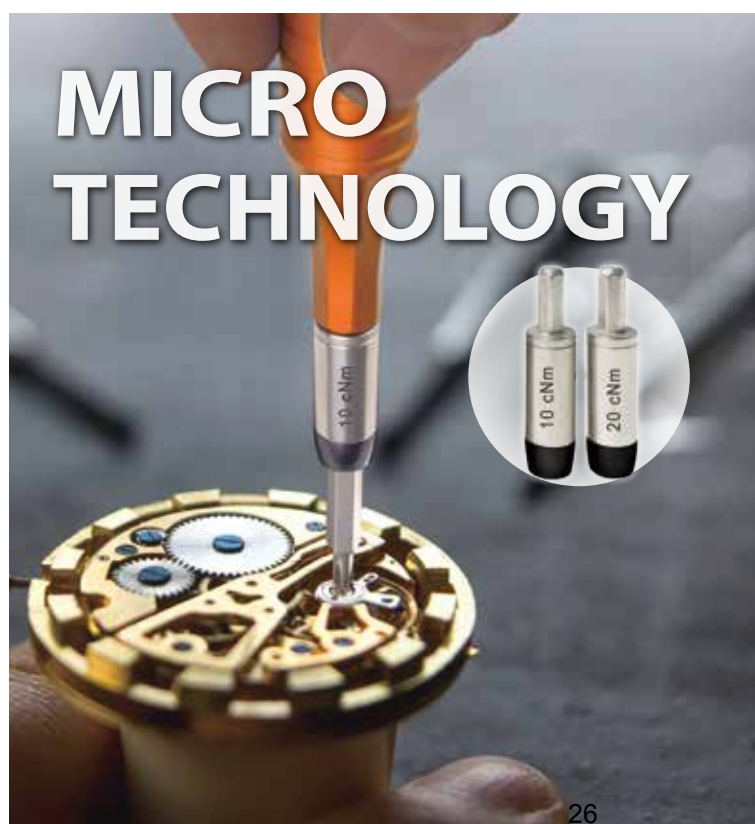

# MICRO TECHNOLOGY



# MEDICAL



# 3C DEVICE



## Features

- No over and under tighten
- "Click" sound
- Precise torque accuracy
- Color identity
- Patented

## Specification


- Torque range: 0.1 ~ 18 Nm
- Connecting and driving portion can be designed by request.

DR.  TORQUE

# ENGINEERING



# CLAMPING

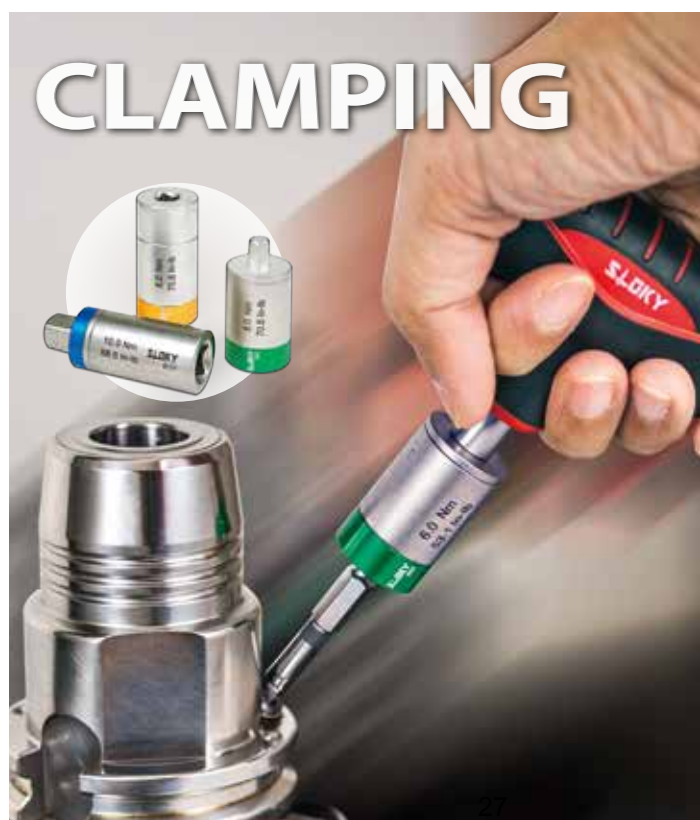



Smart Torque Everywhere Possible

DR.  TORQUE®



[www.drtorque.in](http://www.drtorque.in)



+91 9986426333



[info@drtorque.in](mailto:info@drtorque.in)